

Technical Guidelines on Oil & Lubricants Waste Recycling



Version 1.0 – 22/08/2024

**Waste Strategy and Projects Department
Dubai Municipality**

Document Control

Item	Description			
Document Title:	Technical Guidelines on Oil & Lubricants Waste Recycling			
Doc Ref:	DM-WSPD-P04-030	Version:	1.0	
Classification	<input checked="" type="radio"/> Open data	<input type="radio"/> Shared - Confidential	<input type="radio"/> Shared - Sensitive	<input type="radio"/> Shared - Secret
Status:	Current	Type:	DOC	
Release Date:				
Revision Date:				

Version No.	Date	Author(s)	Signature
1.0	22/08/2024	Ammar Kamil Mohammed Saeed	
1.0	22/08/2024	Omar Qudaih	

Document Review and Approval History

Version No.	Date	Reviewer(s)	Signature
Waste Strategy and Project department			
1.0		Mohammed Iqbal Alkhalsan	
1.0		Ali Abdulla Yousuf Al Jaroodi	

Version No.	Date	Approver(s)	Remarks
1.0		Waste Strategy and Project Department Head	

TABLE OF CONTENT

TABLE OF CONTENT	3
LIST OF TABLES	4
LIST OF FIGURES	4
LIST OF ABBREVIATIONS & DEFINITIONS	5
1 INTRODUCTION	8
2 LEGAL FRAMEWORK, CIRCULARS, AND GUIDELINES	9
3 SCOPE AND COVERAGE	10
4 APPLICATIONS FOR WASTE DISPOSAL PERMITS	10
4.1 ADDITIONAL DOCUMENTS FOR HAZARDOUS WASTES DISPOSAL PERMIT	11
4.2 RECYCLABLE HAZARDOUS WASTES.....	14
5 OPERATORS OF HAZARDOUS WASTE RECYCLING AND TREATMENT FACILITIES PROVISIONS	15
6 OIL & LUBRICANTS WASTE RECYCLING	16
6.1 GENERAL PROVISIONS	16
6.1.1 WASTE RECEIPT, UNLOADING, PROCESSING, AND STORAGE	16
6.1.2 SPILLS AND RELEASES	18
6.1.3 FIRES AND EXPLOSIONS	19
6.1.4 AIR EMISSIONS	20
6.1.5 WATER EFFLUENTS.....	20
6.2 BIOLOGICAL AND PHYSICO-CHEMICAL TREATMENT	20
6.2.1 AIR EMISSIONS	21
6.2.2 WATER EFFLUENTS.....	21
6.2.3 WASTE RESIDUALS	22
7 OCCUPATIONAL HEALTH AND SAFETY	23
7.1.1 ACCIDENTS AND INJURIES	23
7.1.2 CHEMICAL EXPOSURE	23
8 REFERENCES	25
ANNEX 1: REQUEST FOR PERMIT OF WASTES DISPOSAL.....	27
ANNEX 2: HAZARDOUS WASTES CLASSIFICATION IN THE EMIRATE OF DUBAI	28
ANNEX 3: WASTEWATER DISCHARGE LIMITS	29
ANNEX 4: APPLICATION FORM FOR WASTE PROCESSING/RECYCLING	30
ANNEX 5: SAMPLE HAZARDOUS WASTE DISPOSAL PERMIT.....	31
ANNEX 6: ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES	32
ANNEX 7: LIST OF EUROPEAN WASTE CATALOGUE (EWC) OF WASTE OILS	35

LIST OF TABLES

Table 1: Acceptance criteria for hazardous wastes.	12
Table 2: Parameters of Laboratory Analysis.	12
Table 3 Classification of Hazardous Wastes in the Emirate of Dubai	28
Table 4 Dubai wastewater discharge limits according to the Environmental Standards and Allowable Limits of Pollutants on Land, Water, and Air.	29
Table 5 Application Form for Permit/NOC for Waste Processing/Recycling	30
Table 6 Sample Permit for Disposal of Hazardous Waste to DM Accredited Recycler	31
Table 7 Environmental Factors and Mitigation Measures.....	32
Table 8 Collection categories of used oil and their respective EWC codes.	35

LIST OF FIGURES

Figure 1 Post EC Compliance Monitoring and Reporting.....	16
Figure 2: Online registration & request for permit of waste disposal procedures.	27

LIST OF ABBREVIATIONS & DEFINITIONS

AESEAS	Environment Sustainability and Environmental Assessment Section
DET	Department of Economy & Tourism
DM	Dubai Municipality
EC	Environmental Clearance
HMP	Hazard Management Plan
NOC	No Objection Certificate
OHSMS	Occupational Health and Safety Management System
PPE	Personal Protective Equipment
TCLP	Toxicity Characteristic Leaching Procedure
VOC	Volatile Organic Compounds
WSPD	Waste Strategy and Projects Department
WTS	Waste Treatment Section
WWTP	Wastewater Treatment Plant
Disposal	Refers to any or combination of the following means or processes where waste is subjected to or rendered for: <ul style="list-style-type: none">• Direct tipping into landfill;• Incineration, burning or combustion in a controlled manner for the purpose of getting rid of waste material;• Final deposit at any DM waste treatment complex or landfill; The process of segregation and recovery of the materials for the purpose of recycling or reuse is not considered a disposal
Difficult Waste	The non-hazardous material requires special handling to avoid any unacceptable annoyance or environmental impact.
Disposal Site	The site with defined area and boundaries is intended as the final depository of waste. It may be a final depository site of lined or unlined landfill or any dedicated facility for waste treatment. In the case of waste intended for export, the name of the receiving state or locality shall be referred to as the disposal site.
Emirates International Accreditation Centre (EIAC) ¹	The competent authority responsible for the accreditation of private company laboratories for environmental testing
Environmental Standards	Within the context of this document and pursuant to the Local Order on the Environment Protection Regulations in the Emirate of Dubai, are the specified values of environment quality indicators or allowable limit of pollutants in the waste stream when discharged into a segment of the environment, beyond which, it can cause pollution and impair the quality of the environment.
Hazardous Materials	Solid, liquid, or gas materials hazardous to mankind's health severely affect the environment, such as toxic explosives, and flammable or ionized radiation materials.
Non-hazardous waste	is a waste or mixture of wastes that does not pose a substantial threat to public health or the environment and is safer to handle, store, and dispose of compared to hazardous waste. However, it can be harmful to the environment if left untreated. This category includes everyday household items like food waste, paper, cardboard, plastics, glass, metals, and textiles, as well as non-toxic

¹ Previously Dubai Accreditation Centre

Technical Guidelines on Oil & Lubricants Waste Recycling

	industrial waste, uncontaminated construction and demolition debris, organic waste like yard trimmings and agricultural residues, and certain electronic waste.
Hazardous waste	A waste or a mixture of wastes containing one or more properties of a hazardous substance, i.e., being toxic, infectious, corrosive, flammable, oxidizing, radioactive, reactive, or explosive which, at certain concentration or conditions and improper handling, can cause substantial harm to human, properties or to the environment.
Landfill	An area generally used for the disposal of solid wastes by burial. It is either an ordinary unlined landfill or an engineered landfill with basal lining of an impervious material and fitted with a leachate collection system
MSDS	Material Safety Data Sheet – is a document that contains information on the hazard evaluation of the use, storage, handling, and emergency procedures related to that material.
RASID	Dubai Municipality has introduced the RASID waste management monitoring system to regulate operations of registered waste management companies by streamlining and monitoring waste management transportation and associated activities – from collection through transit and till disposal, from analysis review to end-user solutions and by controlling illegal and unauthorized dumping practices.
Recyclables	Waste materials that are broadly classified, within the context of this Policy, as “recyclables”, which contain valuable materials meant for recycling or reuse. Recyclables include, for example, papers, plastics, cartons, wood, metals, glass, tires, textiles, lead-acid batteries, Hybrid and Electric Vehicle Battery (EVB) such as Li-ion and NiMH & other EVB, automobiles, WEEE, and many other similar discarded used products.
Sludge	Solid waste or granular waste at spadable consistency with no free liquid which has been obtained from the treatment of waste or process refuse from a commercial or industrial operation.
Trade Wastewater	Non-hazardous wastewater generated and discharged from industrial operations or commercial other than domestic wastewater.
Unwanted material	Any material/goods declared by their owner to be unwanted and require disposal, or of which a decision for their destruction/ disposal is issued by a competent authority, or that proper disposal requires special care
Treatment (of waste)	An induced change, normally carried out in a treatment facility, in the physical or chemical composition of the waste so as to make it less hazardous, less in volume, and acceptable for final disposal
Waste	Any material disposed of because it is no longer needed. It includes general wastes, hazardous wastes, difficult wastes, and other wastes as classified by the Waste Management Department.
Waste Generator	Any person or party who produces the waste material and/or the Occupier and/or Owner of the premises or facility where the waste is generated. The waste generator is also the “Owner of waste.”
Wastewater	All spent water is discharged from any activity of man or industrial process. For the purpose of this document, it is further classified into 2 types namely: a) domestic wastewater and b) trade wastewater.

Technical Guidelines on Oil & Lubricants Waste Recycling

WDS	Request for Permit of Waste Disposal (Hazardous/Trade Waste/Unwanted Materials) - An online permitting system for disposal of all types of waste/wastewater (except domestic waste) generated in the Emirate of Dubai.
Waste Collection	Collection within the meaning of this guideline is the loading, transport & any interim storage of waste for the purpose of transportation to a waste disposal and/or treatment plant.

1 INTRODUCTION

This guideline underscores adherence to the specified legal and regulatory framework, ensuring that activity 3830902- Oil & Lubricants Waste Recycling is conducted in compliance with established laws, circulars, and guidelines. This serves to standardize practices across the industry, promoting sustainable waste management practices, safeguarding public health, and preserving the environment within the Emirate of Dubai.

The guideline encompasses operational procedures, safety protocols, contractual obligations, and permit requirements to ensure that waste management practices are conducted responsibly and sustainably within Dubai. Hence, this Technical Guide is intended to deliver:

- a) General provisions such as mandatory training for all personnel involved in oil & lubricant waste handling and disposal,
- b) Oil & Lubricants waste disposal provisions and permitting requirements,
- c) Procedures and requirements of Oil & lubricants waste facilities and their operators.
- d) Specific provisions for Oil & Lubricants Waste Recycling activity

Sample forms and permits are presented in the Annexes.

2 LEGAL FRAMEWORK, CIRCULARS, AND GUIDELINES

The relevant provisions of the following laws and regulations were used as guidance and references in the preparation of this technical guideline.

- Cabinet Decision No. (33) of 2018 on the circulation of used oils
- Circular No. (1) of 2020 On the Comprehensive Inventory of the Recyclable Waste Data in the Emirate of Dubai
- Cabinet Decision No. (37) of 2001 on the Executive Regulations of Federal Law No. (24) of 1999 on Environmental Protection and Development - Hazardous Materials, Hazardous Waste and Medical Waste Regulations
- Federal Law (No.) 24 of 1999 and modified by Federal Law (No.) 11 for 2006 regarding Protection & Development of the Environment.
- Executive Order of Federal Law No. 24 of 1999 for Regulation of Handling Hazardous Materials, Hazardous Wastes and Medical Wastes, issued by Cabinet Decree No. 37 of 2001
- Local Order No. 11 of 2003 on Public Health and Safety of the Society in the Emirate of Dubai
- Local Order (No.) 61 of 1991 on the Environment Protection Regulations in the Emirate of Dubai
- Local Order (No.) 7 of 2002 on Management of Waste Disposal Sites in the Emirate of Dubai; as amended by Local Order No. (5) of 2003
- Executive Council Resolution (No.) 58 of 2017 Concerning the Approval of Fees and Fines of Waste Disposal in the Emirate of Dubai
- Executive Council Resolution No. (14) of 2015 Amending the Schedule of Public Hygiene-related Violations and Penalties Attached to the Implementing Bylaw of Local Order No. (11) of 2003 Concerning Public Health and Community Safety in the Emirate of Dubai
- Procedures and guidelines for implementing and implementing Administrative Order No. 30/2003, in accordance with Local Order No. 11/2003
- UAE Occupational Health and Safety Management System (OHSMS) National Standard
- Technical Guideline No. 4. on Duty of Care
- Technical Guideline No. 5. on Waste Classification
- Technical Guidelines (97) for Personal Protective Equipment – Foot Protection HSE from the Health & Safety Department
- Technical Guidelines (98) for Personal Protective Equipment – Hand Protection HSE from the Health & Safety Department
- Technical Guidelines (99) on Safety Signs at Work from the Health & Safety Department
- Technical Guidelines (59) for Personal Protective Equipment – Eye and Face Protection HSE from the Health & Safety Department
- Technical Guideline on Lubricants & Petroleum Wastes Transport

- Technical Guidelines on Used Lubricants Collecting Services

The related circulars and posted information bulletin of this guideline are posted on Dubai Municipality's website – www.dm.gov.ae link to the Waste Department.

The Duty of Care Program is a management tool that controls the waste generated in Dubai. The regulation requires that all transfers of waste are appropriately recorded in order to assist in tracking the quantity generated and movements of waste. Waste treatment & recycling facilities must, therefore, ensure that the required signatures accompany the transfer of waste both into and out of their site and that there is an adequate description (source, quantity, and type) of the waste which contains all the information necessary for safe handling, treatment, recovery, or disposal.

3 SCOPE AND COVERAGE

These Technical Guidelines apply to both waste generators and waste operators involved in activities concerning waste treatment and recycling facilities licensed by the Department of Economy & Tourism (DET) to conduct 3830902- Oil & Lubricants Waste Recycling activity in the Emirate of Dubai, including Free Zone Authorities as applicable.

4 APPLICATIONS FOR WASTE DISPOSAL PERMITS

The procedure for securing an online permit for the treatment and recycling of waste materials must be conducted through the DM Waste Treatment Section (DM-WTS) by requesting a Permit of Waste Disposal through the waste disposal service (WDS) to send the waste materials to a DM-Accredited Recycler or a facility operated by DM as shown in Annex 1: Request for Permit of Wastes Disposal. The WDS can be accessed at the Dubai Municipality's website – hub.dm.gov.ae - upon login with a UAE Pass/ User Management ID and password.

The WDS system conveniently allows applicants to file disposal requests 24/7, view request status, and print the WDS upon approval, including online payment of disposal charges. The following steps summarize the process of applying for an online WDS:

1. **The Waste Generator logs in using Google Chrome at hub.dm.gov.ae as a business with UAE pass/DMUM ID and clicks on “Apply for Service” -**

“Request for Permit of Wastes Disposal (Hazardous/ Recyclable/ Unwanted Materials)” and chooses “New Permit” with all the necessary attachments for each type of waste as will be described in the next sections.

2. **File attachments should be in PDF format.** (Ex. BL.pdf, photos.pdf)
3. **Total amounts of waste to be declared in the disposal request shall be in metric tons with the estimated quantity for the wastes that have been accumulated,** including the estimated waste amount to be sent to the facility during the validity period of the permit (three months from the date of issuance).
4. **The applicant will be informed through e-mail and SMS** once the application is approved by the WDS system.
5. **The exact address of the facility where waste is generated and stored shall be specified in the waste location details** in the application.
6. The “Permit of Disposal/Destruction” can be obtained by logging in to the WDS account and clicking “Download Permit”.
7. The payment (amount in AED) can be paid by an approved transporter with a valid NAFITH (smart gate) and RASID (GPS) account in DM-designated or accredited sites & facilities.
8. Alternatively, the fee can be paid by the owner of the waste (waste generator/applicant) who wishes to obtain a “Destruction Certificate” as proof that the waste has been accepted and disposed of at any DM-controlled waste treatment site. Similar to the permit process, the waste generator/applicant must log in at hub.dm.gov.ae as a business with UAE pass/DMUM ID. Click “Apply for Service” - “Request for Permit of Wastes Disposal (Hazardous/Trade Wastes/Unwanted Materials”, choose “Disposal Certificate” in the request Type, select WDS permit on the drop-down list, get details and pay the corresponding fee online.

4.1 Additional documents for Hazardous Wastes Disposal Permit

In addition, for hazardous wastes disposed at DM-operated facilities, the following summarizes the required documents and specific requirements per type of waste:

1. Hazardous wastes intended for disposal must be classified as presented in Annex 2.
2. Specific instructions and required attachments per waste type for acceptance at DM-operated facilities are summarized in the following table:

Table 1: Acceptance criteria for hazardous wastes.

Hazardous Waste Type	Waste Acceptance Criteria
Flammable Wastes	Provide a separate disposal request for chemicals with a flash point of below 60°C. The flash Point can be found in the MSDS and/or through a Flash Point analysis by a DM-accredited laboratory.
Sludge	Sludge shall be dewatered to spadable consistency and with no free liquid. Sample collection for laboratory analysis shall be conducted only when the sludge condition has been met.
Waste from Vessel or Ship in Port	Waste coming from a Vessel/Cruise Ship arriving at any port of Dubai shall attach an <u>Advance Notification Form for Waste Delivery</u> signed by the captain of the vessel or ship and by the Port Reception Facility.

3. Attach photos of the waste (except for wastewater), including:
 1. Photos of waste inside the container; photos of the container;
 2. Photos of the labels, including manufacturing and expiry date;
 3. Photos showing all the wastes (example: photo-packed in pallet);
 4. Photos of the area where and how the waste is generated and stored.

4. Attach an Analysis Report from any accredited laboratories from Emirates International Accreditation Centre (EIAC)² for the following specific waste types with the respective minimum required analysis parameters as per the table below:

Table 2: Parameters of Laboratory Analysis.

Waste Type	Parameters
For Wastewater	pH, Total Suspended Solids, Total Dissolved Solids, BOD5, COD, Oil/grease (emulsified), Free Oil, Sulphates, Sulphides, Ammoniacal Nitrogen, Metals (Al, As, Cd, Cr, Cu, Pb, Mn, Hg, Ni, Ag, Se, Zn), and Total heavy metals.
	To add the following parameters for specific industry
	Metal Processing Industries: Chlorides, Cyanides as CN, Fluoride, Ammonia Nitrogen, Phenols, % HCl, Metals (B, Fe, % Iron).
	Food Processing Industries: Ammonia-Nitrogen, Fecal Coliform, E-Coli.
	Wastewater mixed with ink, paints, solvents, etc.: water content.
	Mixed with Solvent: to include parameters for Solvent wastes if wastes have more than 10% solvent or include Flash Point if COD exceeds

² List of Accredited Laboratories: <https://eiac.gov.ae/directory>

Waste Type	Parameters
	100,000mg/L. Mixed with Solvent: to include parameters for Solvent wastes if wastes have more than 10% solvent or include Flash Point if COD exceeds 100,000mg/L.
For Sludge & contaminated soil	pH, % Solids (fixed/volatiles/total), moisture content (%), chloride, Oil content (% by weight), flash point (°C), Metal Concentration and Metal TCLP (As, Cd, Cr, Co, Cu, Pb, Hg, Ni, Se, Sn, Zn). For contaminated soil due to fuel spills of more than 10 Liters: Total Petroleum Hydrocarbon and BTEX (benzene, toluene, ethyl benzene, and xylenes).
For Used Chemicals, inks, paints, solvents, etc.	pH, % Solids, volatiles, hydrocarbon, water content (%), Flashpoint (°C), Oil content (% by weight), Metals (Al, Cd, Cr, Co, Cu, Pb, Mn, Hg, Ni, Ag, Zn), and Total heavy metals.

The laboratory analysis report shall not be more than (one) 1 month from the sampling date. A new analysis report is required for every permit application.

Other tests may be required by the WDS reviewer to further determine the hazardous nature of the waste. Samples shall be collected only by EIAC Accredited Laboratories from the waste generator’s facility & photo documentation during sampling should also be attached to the WDS Application. Waste sampling and analysis shall be in accordance with the EIAC analysis procedures.

Waste (except for wastewater) generated regularly, which is well characterized and with consistent quality, would require a new laboratory analysis report only once every year or as may be required by the WDS reviewer. To be classified in this waste category, the company should at least have applied for the same type of waste with corresponding laboratory analysis for no less than 5 years. **For hazardous wastewater generated regularly, a new analysis report is required semi-annually or as may be required by the WDS reviewer.**

5. For wastewater, any company that will generate or has a history of generation of at least or more than 300 m³/year (12 months) of hazardous wastewater will be required to install an on-site wastewater treatment plant (WWTP). Otherwise, the waste generator has the option to subcontract the treatment of liquid hazardous waste to a private third-party company with an approved facility for the activity of Wastewater & Hazardous Liquids Treatment. A **“Permit for Disposal of Hazardous Waste”** is required to transport the liquid waste to a 3rd party facility. Moreover, wastewater that exceeds the sewer discharge limit, as

presented in Annex 3 shall be neutralized at the source to a non-corrosive state.

6. For **Hazardous Unwanted Materials and expired pharmaceutical items which are declared as waste** and unsuitable for use in their original form, the owner of waste must provide the following:
 - Material Safety Data Sheet (MSDS) (if applicable)
 - Shipping/importation documents, including:
 - Bill of Lading
 - Bill of Entry (Customs Declaration);
 - Inventory of all chemicals for 2 or more items according to the template as specified in WDS.
 - For expired pharmaceuticals, a list of medicine and/or drug inventory must be additionally submitted³.

4.2 Recyclable Hazardous Wastes

For **Hazardous Wastes intended for recycling** at DM-accredited facilities & recyclers the following is additionally required:

1. **Application Form for Permit/NOC for Waste Processing/Recycling (Acceptance Letter)** using the format provided by the chosen recycler and as shown in Annex 4. A list of DM-approved recyclers is available on the DM Website, link to the “Waste Department Information Bulletin”.
2. A **copy of the WDS permit shall be submitted to the DM-accredited recycler** to set the schedule of transport and to obtain a collection receipt and Destruction Certificate from the recycler for recording⁴.
3. After completion of the recycling/reprocessing of recyclable waste materials, **the waste generator/applicant must log in using Google Chrome at hub.dm.gov.ae as a business with your UAE pass/DMUM ID. Click “Apply for Service” - “Request for Permit of Wastes Disposal (Hazardous/Trade Wastes/Unwanted Materials”, Choose “Disposal Certificate” in the request Type, select WDS permit on the drop-down list, get details, and upload the recycling certificate.**
4. The DM Accredited Recyclers are required to submit a **monthly Comprehensive Material Recovery Report (MRR)** of the recyclable waste materials being processed by their facility to the Waste Treatment Section

³ Note: Any product, goods, or merchandise being applied for disposal will be assessed based on the submitted documents.

⁴ Note: The applicant must add the remark that they undertake that only the above declared wastes will be sent for recycling and that together with the recycler they will be jointly responsible for the safe handling, recycling, and final disposal of any waste by-product.

(WTS) every second (2) day of every month as per Circular No. (1) of 2020 On the Comprehensive Inventory of the Recyclable Waste Data in the Emirate of Dubai.

5. For **hazardous waste recyclers**, the **specific waste acceptance criteria set by the facility operators must be complied with.**
6. **Disposal fees are set by the facility operator.**
7. Samples of permits for the disposal of hazardous wastes to DM-accredited recyclers can be found in Annex 5

5 OPERATORS OF HAZARDOUS WASTE RECYCLING AND TREATMENT FACILITIES PROVISIONS

The following provisions apply to companies with a valid license for the specific economic activity or any third party engaged through a formal contract and who have attained prior authorization requests on behalf of the contracting party from the WSPD. The decision to accept or reject applications of a similar nature is at the sole discretion of the WSPD.

All facilities must comply with the **Post Environmental Clearance (EC) Compliance Monitoring and Reporting** which involves both Regulatory Monitoring (i.e. primarily site inspection of the facility performed by the DM-Environmental Sustainability department) and as applicable, self-monitoring in the form of Emissions Inventory reporting or submission. Facilities with emission sources are required to submit source descriptions, activity data and pollutant concentrations via the interactive online platform (<http://www.dubaiairenvironment.dm.gov.ae>), in accordance with the compliance conditions of the EC. A user account to access the **online platform should be requested by contacting DM- Environment Sustainability and Environmental Assessment Section (AESEAS) via Emission_Inventory@dm.gov.ae.**

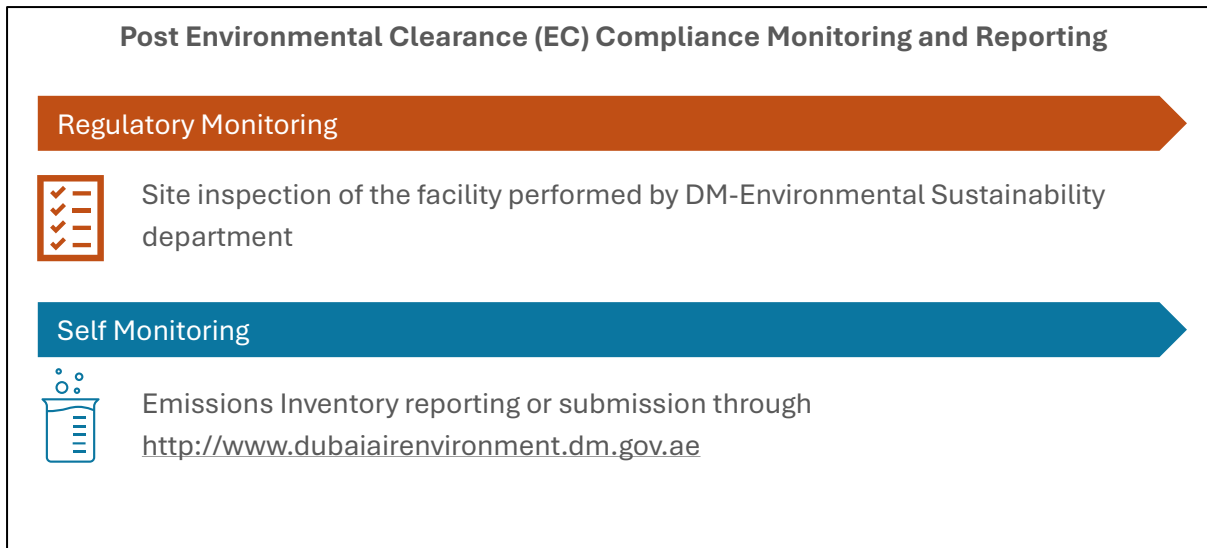


Figure 1 Post EC Compliance Monitoring and Reporting

Moreover, facilities must ensure that any appointed laboratory involved in the monitoring is accredited by EIAC⁵, for the specific tests. In Addition, WSPD requires a 3rd party audit annually: waste audit, environmental audit and safety audit.

In alignment with the WDS procedures, and as mentioned previously in section 4, all DM Accredited Recyclers are required to submit a monthly comprehensive MRR of the recyclable waste materials being processed by their facility to the WTS every second (2) day of every month as per Circular No. (1) of 2020 On the Comprehensive Inventory of the Recyclable Waste Data in the Emirate of Dubai.

6 OIL & LUBRICANTS WASTE RECYCLING

6.1 General Provisions

During the operation of the Oil & Lubricants waste facility, it is imperative to ensure that the following key points are adhered to. Please also refer to the Technical Guideline on Lubricants & Petroleum Wastes Transport & Technical Guidelines on Used Lubricants Collecting Services for further requirements.

6.1.1 Waste Receipt, Unloading, Processing, and Storage

Given the inherent hazards associated with oil & lubricant waste, it becomes crucial for facilities managing oil & lubricant waste to comprehend and regulate the characteristics of the oil & lubricant waste accepted for storage, treatment, or disposal. Insufficient identification and classification of incoming waste may lead to subpar treatment or disposal, as well as unintended reactions that could release hazardous substances or trigger fires and explosions. Consequently,

⁵ List of Accredited Laboratories: <https://eiac.gov.ae/directory>

required measures to govern waste acceptance and general actions to alleviate risks at oil & lubricant waste management facilities encompass:

- Establishing and maintaining a close relationship with the oil & lubricant waste generator to understand the process generating the waste and to monitor any changes in the process or waste characteristics;
- Obtain a thorough understanding of the incoming oil & lubricant waste. Such knowledge needs to take into account the oil & lubricant waste characteristics and variability, the origin of the waste, the treatment and disposal under consideration, the nature of the waste residuals (acid tar, spent clay, centrifuge sludge and process water), if any, that may be generated during treatment, and potential risks associated with waste treatment and disposal;
- As mentioned previously in section 4.2, oil & lubricant waste facility operators must set specific **Waste Acceptance Criteria** which must be shared beforehand with the waste generator. This acceptance criteria shall include, as applicable, tests of the incoming waste and documentation of the waste source (e.g., the processes producing the waste, including the variability of the process) and identifying the appropriate treatment/disposal.
- Maintain records of the total quantity of oil & lubricants waste and each received and processed as well as disposal certificates of any process residuals produced. These records must be available for inspection.
- A list of all hazardous materials/chemicals used in the process should be maintained along with their expiry dates.
- Proper weighing scales must be available at the facility, and calibration certificates must be maintained for inspection.
- If bulk transport is used, maintain suitable weighbridge receipts for all inward and outward movements.
- A digital process flow diagram of the treatment process must be available
- A mass balance (in %) of all input and output streams must be available
- All output waste streams and products, such as recycled oil and lubricant, must only go to licensed disposal facilities, respectively, off-takers.
- Used oils & lubricants may not be mixed with other wastes nor may waste oils of different categories/types be mixed. Annex 7 details the classifications of various types of used lubricant waste according to the European Waste Catalogue (EWC) and according to different collection categories.
- Category I used oils can be regenerated/reprocessed without restriction. These include engine, gear and hydraulic oils. Regeneration/reprocessing

of all other used oils is permitted, provided they do not contain any harmful substances that may accumulate in the products. Furthermore, used oils with concentrations of PCBs in excess of 20 ppm (parts per million or mg/kg) or a total halogen content of more than 2g/kg may not be regenerated unless the harmful substances are with certainty destroyed during regeneration.

- Waste/used oil regeneration technologies depend to some degree on the quality of waste oil particularly if it does not contain significant concentrations of more difficult-to-process oil products such as heavier fuel oils or chlorinated hydrocarbons. The presence of such materials can seriously disrupt the technical performance of the regeneration process, and its ability to produce lubricating or similar products of sufficiently good quality.
- Implement an acceptance procedure that includes, as applicable, procedures that limit the acceptance of oil & lubricant to only that which can be effectively managed, including effective disposal or recovery of residuals from waste treatment. Only accept oil & lubricant if the necessary storage, treatment capacity, and disposition of any treatment residuals (e.g. acceptance criteria of the output by another treatment or disposal facility) are assured. The reception facility should include a laboratory to analyze incoming waste samples at the speed required by facility operations to determine if the waste is acceptable;
- In the case of treatment, analyze the waste output according to the relevant parameters important for the receiving facility (e.g. landfill or incinerator);
- Sufficient personnel with the requisite qualifications should be available and on duty at all times. All personnel should undergo specific job training.

6.1.2 Spills and Releases

Incidents like overfills, vehicle accidents, and failures in tanks and piping systems may result in releases during the storage and handling of waste. It is recommended to conduct the following measures:

- Use of dedicated fittings, pipes, and hoses specific to materials in tanks (e.g., all acids use one type of connection, all caustics use another), and maintaining procedures to prevent the addition of hazardous materials to incorrect tanks;

- Use of transfer equipment that is compatible and suitable for the characteristics of the materials transferred and designed to ensure safe transfer;
- Regular inspection, maintenance and repair of fittings, pipes and hoses;
- Provision of secondary containment, drip trays or other overflow and drip containment measures for hazardous materials containers at connection points or other possible overflow points;
- Overfills of vessels and tanks should be prevented as they are among the most common causes of spills resulting in soil and water contamination and among the easiest to prevent.
- Segregate hazardous wastes and materials from non-hazardous wastes and materials;
- Separate incompatible wastes, such as certain alkaline and acidic wastes that would release toxic gases if mixed; keep records of testing; store waste in separate drums or vessels based on their hazard classification;
- Lockout valves controlling material and waste transfer when not in use;
- Waste containers should be suitably labelled to include details of their contents and that their locations are recorded in a tracking system;
- Transfer or decant only one type of material at any one time;
- Conduct regular training and exercises for site staff regarding emergency procedures;
- Provide sufficient firewater containment to prevent uncontrolled discharge of water off-site in the event of a fire.

6.1.3 Fires and Explosions

Given the flammable and reactive nature of industrial hazardous wastes, it is essential to take specific precautions during their handling to avert accidents. Prevention and control strategies include:

- Firefighting equipment appropriate to the type of waste received at the site should be available;
- Minimize the storage of flammable liquids on site (e.g. fuel, flammable wastes);
- Use of a nitrogen atmosphere for organic waste liquid with a low flashpoint stored in tanks;
- Perform crushing and shredding operations under full encapsulation and under an inert or exhausted atmosphere for drums and containers containing flammable or highly volatile substances;

- Provide an emergency tipping area for waste loads identified to be on fire or otherwise deemed to be an immediate risk;
- Prepare and annually review a fire risk assessment.

6.1.4 Air Emissions

Air emissions might involve the discharge of particulate matter and VOCs from storage vessels and equipment used in waste processing⁶. Facilities engaged in hazardous waste incineration should aim to reduce leaks from equipment involved in the transfer of hazardous waste, such as pumps and piping, by instituting a leak detection and repair program.

6.1.5 Water Effluents

Wash water and run-off can arise from storage and processing activities in waste management areas. The section covers general measures for controlling run-off. Furthermore, the subsequent techniques are advised for the prevention, reduction, and management of water effluents:

- Collect and treat wash water and run-off from waste storage and handling areas as potentially hazardous unless analytical tests determine otherwise;
- Segregate run-off from areas storing incompatible wastes.

6.2 Biological and Physico-Chemical Treatment

Biological and Physico-chemical treatment processes aim to eliminate, segregate, concentrate, or confine waste materials, reducing potential environmental, health, and safety risks and promoting the environmentally responsible management of the wastes. Typically applied to aqueous solutions or sludge, these treatments may be effective only for specific waste types and can face challenges from constituents in other waste streams. Hence, the waste acceptance procedures discussed earlier are particularly crucial. Many processes in this sector involve advanced equipment technology, necessitating well-trained staff.

⁶ Additional information on VOC emissions prevention programs is provided in 40 CFR Part 264, Subparts BB and CC (http://www.access.gpo.gov/nara/cfr/waisidx_99/40cfr264_99.html)

Guidelines for preventing, minimizing, and controlling potential environmental impacts from chemical treatment include:

- Design and operate facilities in accordance with applicable national requirements and internationally accepted standards⁷;
- Prepare a quality control plan, which includes a definition of personnel roles, responsibilities, and qualifications, inspection procedures, and documentation;
- Clearly define the objectives and the expected reaction chemistry for each treatment process;
- Assess each new set of reactions and proposed mixes of wastes and reagents in a laboratory-scale test prior to waste treatment;
- Specifically, design and operate the reactor vessel so that it is fit for its intended purpose; this includes special coatings, foundations, and sensors for optimal temperature and pressure operations;
- Monitor the reaction so that it is under control and proceeding towards the anticipated result.

6.2.1 Air Emissions

- Enclose treatment and reaction vessels so that they are vented to the air via an appropriate scrubbing or other air emission abatement system;
- Install gas detectors (e.g. suitable for detecting HCN, H₂S, and NO_x) and implement safety measures to prevent releases of potentially toxic gases;
- Link the air space above filtration and dewatering processes to the main air pollution abatement system of the plant if such a system is in place.

6.2.2 Water Effluents

Effluent from both biological and chemical processes comprises run-off and leachate, as discussed previously in section 6.1, along with pollution control residuals and waste residuals (e.g., separated aqueous fractions of wastes). **Error! Reference source not found.** To prevent, minimize, and manage water effluents from biological and chemical treatments, the following measures are additionally recommended:

⁷ See, for example, Basel Convention Technical Guidelines on Hazardous Waste Physico-Chemical Treatment and Biological Treatment, Basel Convention Series/SBC No. 02/09; U.S. EPA regulations at 40 CFP Part 264.

- Add flocculation agents to the sludge and wastewater to be treated to accelerate the sedimentation process and to facilitate the further separation of solids or, where practical, use evaporation (which avoids the use of flocculation agents);
- Preventing the mixing of wastes or other streams that contain metals and complex agents.
- Store leachate in a lined earthen basin or aboveground storage tanks;

6.2.3 Waste Residuals

Solid waste residuals are commonly produced through biological and chemical treatments and necessitate proper disposal. Suggested measures for preventing, reducing, and managing solid wastes involve:

- Restrict the acceptance of wastes to be treated by solidification/immobilization to those not containing high levels of VOCs, odorous components, solid cyanides, oxidizing agents, chelating agents, high TOC wastes, and compressed gas cylinders;
- Minimize the solubility of metals and reduce the leaching of toxic soluble salts by a suitable combination of water washing, evaporation, re-crystallization, and acid extraction when immobilization is used to treat solid waste containing hazardous compounds prior to landfilling;
- Based on the waste residual's physical and chemical characteristics, solidify, vitrify, melt, or fuse wastes as required/necessary prior to landfill disposal;
- Test the leachability of inorganic compounds (e.g., by using the standardized European Committee for Standardization (CEN) or U.S. EPA Toxic Characteristic Leaching Procedure TCLP) for waste to be landfilled.

7 OCCUPATIONAL HEALTH AND SAFETY

The most significant occupational health and safety impacts typically associated with workers at waste management facilities occurring during operations include:

7.1.1 Accidents and injuries

- Workers are especially susceptible to accidents involving trucks and other moving equipment. Recommended measures include the implementation of traffic management systems and the presence of traffic controllers;
- Accidents may involve slides from unstable disposal piles, cave-ins of disposal site surfaces, fires, explosions, being caught in processing equipment, and being run over by mobile equipment;
- Other potential injuries include those resulting from heavy lifting, contact with sharps, chemical burns, exposure to potentially contaminated substances (i.e. fuel and foul sewage);
- Risk assessments of hazards should be conducted with common risks at oil & lubricant recycling facilities, including manual handling; slips, trips, and falls; being hit by moving, flying, or falling objects; contact with moving machinery; and needles/sharps. Each risk assessment should identify the hazards, decide who might be harmed and how, evaluate the risks, decide on precautions and control measures (i.e. suitable training, regular housekeeping, and PPE), and implement the findings. The risk assessment should be reviewed and updated as necessary.

7.1.2 Chemical exposure

- Smoke, dust, and bioaerosols can lead to injuries affecting the eyes, ears, and respiratory systems;
- Provide workers with appropriate protective clothing, gloves, respiratory face masks, slip-resistant shoes for waste transport workers and hard-soled safety shoes for all workers to avoid puncture wounds to the feet. For workers near loud equipment, noise protection should be included. For workers near heavy mobile equipment, buckets, cranes, and at the discharge location for collection trucks, include provision of hard hats;
- Provide adequate personnel facilities, including washing areas and areas to change clothes before and after work, as well as praying rooms;

- Ventilate enclosed processing areas (e.g., dust in waste size reduction areas, VOCs driven off by high temperatures during composting);
- Monitor breathing zone air quality in work areas at processing, transfer, and disposal facilities. Direct-reading instruments that measure methane and oxygen deficiency are of primary importance; these include combustible gas indicators, flame ionization detectors, and oxygen meters;
- The site should be a designated 'no eating /drinking & smoking area.

To mitigate those risks, it is also necessary to develop a Hazard Management Plan (HMP) in line with the UAE Occupational Health and Safety Management System (OHSMS) (where applicable) to minimize the risk of injury from such hazards. Moreover, contingency plans in the event of equipment failure & Emergency procedures plan need to be considered. Fire safety requirements are also crucial, such as installing a ceiling sprinkler system alarm and fire hoses, which should be in place on-site. This equipment should be clearly marked and tested at appropriate intervals to confirm integrity. Site personnel should be made aware of their location, trained in their correct use, and know when it is safe to use them. Further Environmental impacts and mitigation measures are discussed in Annex 6.

8 REFERENCES

European Waste Framework Directive 2008/98/EC

European Committee for Standardization (CEN) or U.S. EPA leaching procedures)

UNEP. 2000a. Secretariat of the Basel Convention. Technical Guidelines on Hazardous Wastes: Physico-Chemical Treatment/Biological Treatment. Basel Convention series/SBC No. 02/09. Geneva: UNEP.

UNEP. 2000b. Secretariat of the Basel Convention. Technical Guidelines on Wastes Collected from Households. Basel Convention Series/SBC No. 02/08. Geneva: UNEP.

UNEP. 1997a. Secretariat of the Basel Convention. Technical Guidelines on Specially Engineered Landfill (D5). Basel Convention Series/SBC No. 02/03. Geneva: UNEP.

UNEP, Secretariat of the Basel Convention. 1997b. Technical Guidelines on Incineration on Land. Basel Convention Series/SBC No. 02/04. Geneva: UNEP.

International Finance Corporation. (1998). Environmental, Health and Safety Guidelines for Waste Management Facilities. Retrieved from <https://www.ifc.org/content/dam/ifc/doc/1990/waste-mgmt.pdf>

International Finance Corporation. (2007). Environmental, Health, and Safety Guidelines for Waste Management Facilities. World Bank Group. Retrieved from <https://www.ifc.org/content/dam/ifc/doc/1990/waste-mgmt.pdf>

Basel Convention. (1994). The Framework Document 1994 on the preparation of technical guidelines for the environmentally sound management of wastes subject to the Basel Convention. Retrieved from <https://www.basel.int/Implementation/TechnicalMatters/DevelopmentofTechnicalGuidelines/TechnicalGuidelines/tabid/8025/Default.aspx>

Environmental Protection Agency. (1995, April). EPA's Environmental Justice Strategy: Implementing EO 12898.

Federal Ministry for the Environment, Nature Conservation and Nuclear Safety. (2002). Waste Oil Ordinance: Original Version of 1987 and the Amended Version of 2002.

ANNEX 1: REQUEST FOR PERMIT OF WASTES DISPOSAL

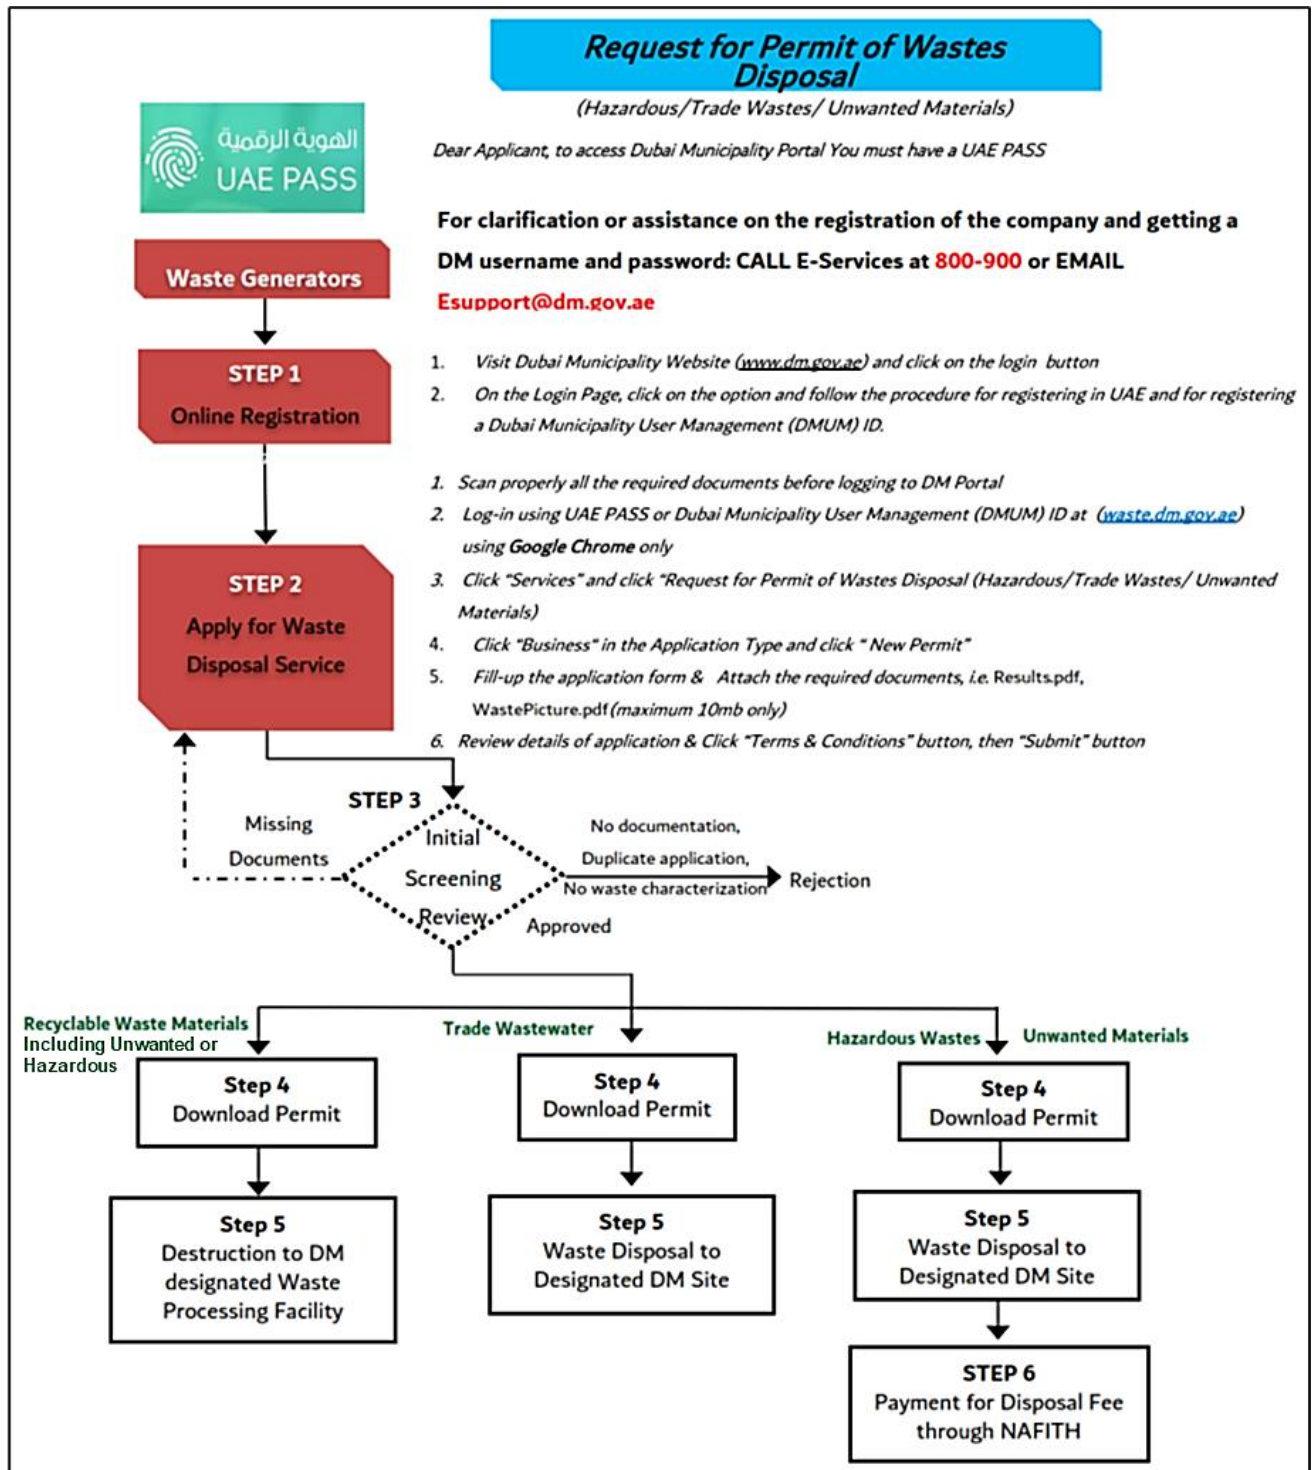


Figure 2: Online registration & request for permit of waste disposal procedures.

ANNEX 2: HAZARDOUS WASTES CLASSIFICATION IN THE EMIRATE OF DUBAI⁸

Table 3 Classification of Hazardous Wastes in the Emirate of Dubai

Class Code	Waste Type	Sub-class Code	Sub-class Waste
W2	Wastewater	2.1	2.1.1 (Wastewater) Inorganic source - others
			2.1.2 (Wastewater) Inorganic source - Vehicle Maintenance Activity
		2.2	2.2.1 (Wastewater) Organic source - others
			2.2.2 (Wastewater) Organic source - Ink and Painting Activity
			2.2.3 (Wastewater) Organic source - Food Industry
		2.3	(Wastewater) Oily source
		W4	Contaminated Materials
4.2	(Contaminated Materials) - Used oil filters		
4.3	(Contaminated Materials) - Contaminated Used Rags		
4.4	(Contaminated Materials) - Contaminated Soil		
4.6	(Contaminated Materials) - Empty Pesticide Containers		
4.5	(Contaminated Materials) - Other contaminated materials		
W6	Inorganic Waste	6.1	(Inorganic Waste) - (Waste treatment residues) Solids
		6.2	(Inorganic chemical wastes) Expired product
		6.3	(Inorganic chemical wastes) Spent catalyst
		6.4	(Inorganic chemical wastes) Process refuse
W16	Oily Waste	16.1	(Oily Waste) - Waste lube oil and similar oil (liquid)
		16.2	(Oily Waste) - Oil sludge
		16.3	(Oily Waste) - Other oil-contaminated wastes

⁸ Note: it is suggested to change this classification to match the EWC or else have the same format and rationale as the non-hazardous wastes presented in TG5.

ANNEX 3: WASTEWATER DISCHARGE LIMITS

Table 4 Dubai wastewater discharge limits according to the Environmental Standards and Allowable Limits of Pollutants on Land, Water, and Air.

INDICATORS		*Maximum Allowable Limits for Discharge to		
		Sewerage System	Land as for Irrigation	
<i>Physico-Chemical</i>	Units		Drip	Spray
Biochemical Oxygen Demand	mg/l	1,000	20	10
Chemical Oxygen Demand	mg/l	3,000	100	50
Chlorides	mg/l		500	350
Chlorine – residual	mg/l	10	Not less than 0.5 mg/l after 30 min contact time	
Cyanides as CN	mg/l	1	0.05	0.05
Detergents	mg/l	30		
Fluorides	mg/l		1	1
Nitrogen, ammoniacal	mg/l	40	5	1
Nitrogen, organic (Kjeldhal)	mg/l		10	5
Nitrogen, total	mg/l		50	30
Oil & Grease – Emulsified	mg/l	150		
Oil & Grease – Free oil	mg/l	50	5	5
pH (range)	units	6 – 10	6.0 – 8.0	6.0 – 8.0
Pesticides, non-chlorinated	mg/l	5		
Phenols	mg/l	50	0.1	0.1
Phosphorous (P)	mg/l	30	20	20
Sulfates, total	mg/l	500	200	200
Sulfides as S	mg/l	10	0.05	0.05
Surfactants	mg/l			
Suspended Solids (SS)	mg/l	500	50	10
Temperature	°C	45 or > 5 of ambient		
Total Dissolved Solids (TDS)	mg/l	3,000	1,500	1,000
Metals				
Total Metals	mg/l	10		
Aluminum (Al)	mg/l		2	2
Arsenic (As)	mg/l	0.50	0.05	0.05
Barium (Ba)	mg/l		1	1
Beryllium (Be)	mg/l		0.1	0.1
Boron (B)	mg/l	2.0	2.0	2.0
Cadmium (Cd)	mg/l	0.3	0.01	0.01
Chromium (Cr)	mg/l	1.0	0.1	0.1
Cobalt	mg/l		0.1	0.1
Copper (Cu)	mg/l	1.0	0.2	0.2
Iron (Fe)	mg/l		2.0	2.0
Lead (Pb)	mg/l	1.0	0.5	0.5
Magnesium (mg)	mg/l		100	100
Manganese (Mn)	mg/l	1.0	0.2	0.2
Mercury (Hg)	mg/l	0.01	0.001	0.001
Molybdenum (Mo)	mg/l		0.01	0.01
Nickel (Ni)	mg/l	1.0	0.2	0.2
Selenium (Se)	mg/l		0.02	0.02
Silver (Ag)	mg/l	1.0		
Sodium (Na)	mg/l		500	200
Zinc (Zn)	mg/l	2.0	0.5	0.2
Bacteriological				
Fecal Coliforms	MPN/100 ml.	500	20	

ANNEX 4: APPLICATION FORM FOR WASTE PROCESSING/RECYCLING

Table 5 Application Form for Permit/NOC for Waste Processing/Recycling

APPLICATION FORM FOR PERMIT/NOC FOR WASTE PROCESSING/RECYCLING			
COMPANY DETAILS			
Waste Generator	(Company name)		
License No.		P.O. Box	
Contact Person		Designation	
Contact Info	Telephone & Mobile	Email	
WASTE DETAILS			
Waste Description			
Source/Process			
Waste Location (Address of Company)			
Packaging Details/ Number of Packages			
Total Weight (tons)			
<small>*The company and wastes details shall be the same in the online Waste Disposal Service request</small>			
RECYCLER DETAILS			
Company Name		License No.	
Address of Recycling Facility			
Contact Info	Telephone & Mobile	Email	
Recycler Reference No.			
ACKNOWLEDGEMENT OF RESPONSIBILITY			
We hereby acknowledge that any misdeclaration, and/or breach of conditions hereof or of applicable environment protection regulations will warrant sanctions or fine as deemed appropriate.			
For RECYCLING Company:		For Waste Generator (Company Name)	
<p>I acknowledge that the declared material applied and on the photos attached for recycling in our facility will not cause any form of pollution either on ground, water or environment during the processing of the wastes.</p> <p>I acknowledge that it is our responsibility to ensure that the material received will be fully destructed and unusable from its original form and will not be distributed in the market.</p> <p>A monthly material recovery report (MRR) will be submitted to Waste Treatment Section (WTS) for processing of waste.</p>		<p>I acknowledge that the wastes stated above was generated by us and is factually described by this application. I hereby certify that the named materials are properly classified, described, packaged, marked and labelled and are in proper condition for transportation.</p> <p>I hereby guarantee that the waste will be delivered to the Dubai Municipality Approved Recycler without loss or alteration.</p>	
(name) (designation)		(company stamp & signature & date)	
(company stamp & signature & date)		(company stamp & signature & date)	

ANNEX 5: SAMPLE HAZARDOUS WASTE DISPOSAL PERMIT

Table 6 Sample Permit for Disposal of Hazardous Waste to DM Accredited Recycler

Waste Operations Department	إدارة عمليات النفايات
Waste Treatment Section	قسم معالجة النفايات
تصريح التخلص من النفايات الخطرة Permit for Disposal of Hazardous Waste	
Ref No <input type="text" value="WDS-240424-44325"/>	Date <input type="text" value="28/04/2024"/>
Application Details بيانات التصريح	
Company Name :	اسم الشركة
License No. :	رقم الرخصة
Mobile No. :	رقم الهاتف المحمول
Email :	البريد الإلكتروني
Waste Details تفاصيل النفايات	
Waste Description :	وصف النفايات
Source/Process :	المصدر / العملية
Waste Location :	موقع النفايات
Package Type :	نوع الحزمة
Qty per package :	
Liquid Wastes(volume) :	النفايات السائلة (الحجم)
Total Weight (Metric Tons) :	الوزن الإجمالي (طن متري)
Holding Tank Capacity (cubic meter) :	سعة الخزان (مكعب)
Applicant Remarks :	ملاحظات مقدم الطلب
We undertake that only the above declared wastes will be sent for recycling. We and the recycler will be jointly responsible for the safe handling, recycling and final disposal of any waste by-product	
Approval Details تفاصيل الموافقة	
Classification :	التصنيف
Disposal Location :	موقع التخلص
Disposal Method :	طريقة التخلص
Remarks :	ملاحظات
This serves as PERMIT for collection and transport of declared wastes above and on the Application Form for Waste Processing/Recycling from waste generator site to facility of the collector/recycler (1) Waste generator shall ensure that the waste is in proper condition for transport of hazardous waste and shall not cause any form of pollution either on ground, water or air environment. (2) Only vehicles with valid "DM	
<p>This document is electronically approved without a signature. To verify the authenticity of this document please visit https://waste.dm.gov.ac/Admin/DocumentVerification/VerifyDocument and enter the Document ID : WDS-240424-44325 and Verification Code : 757756 , or alternatively scan the QR Code</p>	
	
<p>هذه الوثيقة معتمدة إلكترونياً بدون توقيع، و للتحقق من صحتها يمكن زيارة الرابط https://waste.dm.gov.ac/Admin/DocumentVerification/VerifyDocument بإدخال رقم الطلب WDS-240424-44325 و رمز التأكيد 757756 أو مسح QR Code المصادق</p>	

ANNEX 6: ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

Table 7 Environmental Factors and Mitigation Measures

Particulate Matter (PM)	Odour
<ul style="list-style-type: none"> • Paving roads on site. • A bowser is used to spray water onto haul roads and waste storage and processing areas during dry and dusty conditions. • Utilize wheel-washes on incoming and outgoing vehicles. • Align building openings to minimize exposure to prevailing winds. • Install plastic curtains or roller shutter doors over building openings. • Keep station doors closed during operating hours, except when trucks are entering or exiting. • Install misting systems over tipping areas to “knock down” dust particles. • Implement speed limit restrictions on site haul roads. • Cover loads of waste that have the potential to emit significant dust during transport. • Undertake dust monitoring at specified locations on and off-site, if applicable. • Provide all site staff with PPE, including high-visibility clothing, FFP3 masks, and safety glasses. 	<ul style="list-style-type: none"> • Enclose or cover loads of waste. • Refuse to accept certain highly odorous wastes. • Remove any other odorous waste from the premises as soon as practicable. • Increase the distance between the odor source and the receptor. • Practice “first-in, first-out” waste handling practices. • Regularly inspect and monitor waste handling areas. • Frequently clean/wash down waste handling areas. • Install ventilation systems with air filters or scrubbers. • Plant vegetative barriers, such as trees, to absorb and disperse odors. • Install plastic curtains or roller shutter doors on entrances and exits to contain odors when doors are opened to allow vehicles to enter or exit.
Water and Soil Pollution	Noise and Vibration
<ul style="list-style-type: none"> • Locate plants outside local flood zones, if applicable. • Cover the waste - use rain-tight and leak-tight HGVs and containers. • Keep surface water free of run-off contamination from waste, mud, and fuel/oil. • Implement impervious surfaces (i.e. paved surfaces) and engineered drainage systems. Ensure that there are sealed systems in place for potentially contaminated leachate from stored waste so that it is collected separately from surface water. • Use secondary containment around temporary storage areas, i.e. fuel. • Collect soil samples on-site and within immediate locations to establish baseline conditions. • Monitor the composition of the surface water (e.g. sampling at agreed locations, upstream/downstream of the site, on a monthly/quarterly basis). • Monitor the flow and composition of foul water/sewer discharge. • Undertake site walkover (including nearby surface water courses) at agreed intervals. • Provide all site staff with PPE, including steel-tipped boots and gloves. 	<ul style="list-style-type: none"> • Select quiet working equipment. • Shut down equipment when not in use. • Set a site speed limit of 15km per hour (or appropriate to site conditions and surroundings). • Enclose all waste-handling operations. • Concrete walls and structures should be used, which absorb sound better than metal structures. • Install shielding or barriers, such as trees, berms, or walls, around the facility to block and absorb noise. • Insulate building walls with sound-absorbing materials. • Locate administrative buildings between sources of noise and the community. • Locate sorting plant building openings (i.e. doors) away from receptors. • Keep doors closed during operating hours, except when vehicles are entering or exiting. • Establish operating hours that avoid early morning or late-night operations. • Set facility noise level limits and adhere to them.

	<ul style="list-style-type: none"> Record incidents of noise or vibration that exceed these limits – these should be diarized so that potential causes can be identified, and procedures put in place to eliminate them. Provide all site staff with PPE, including noise dampening earplugs/muffs.
Litter	Traffic
<ul style="list-style-type: none"> Covering all incoming and outgoing loads. Implementing daily litter inspections and pick-ups at the facility and on surrounding streets. A perimeter fence must be installed to prevent windblown litter from leaving the site. 	<ul style="list-style-type: none"> Create a robust and formal transport management plan. Design internal and external roads to include highly visible markings, barriers, and signs (i.e. speed restrictions, traffic flow and separation areas between vehicles and pedestrian movements). Drivers should be appropriately trained and licensed. Create acceleration, deceleration, or turning lanes at site entrances and exits (where applicable) to maintain steady traffic flows around the facility. Work with the community to designate inbound and outbound Heavy Goods Vehicles (HGV) traffic routes and ensure that drivers follow these routes. Avoid traffic flows adjacent to noise-sensitive property. Restrict incoming HGV queueing on public streets, i.e., if inadequate space is available on site to accommodate waiting HGVs, use a remote site as a waiting area for HGVs. Where possible, schedule incoming traffic so that it does not coincide with local rush hours. Regularly maintain and service vehicles to ensure they are running as efficiently as possible. Switch off vehicles when not in use (both on-site and visiting vehicles). Provide all site staff with PPE, including high-visibility clothing and steel-tipped boots.
Flies, Vermin and Birds	Exposure to Potentially Hazardous Equipment and Substances

- | | |
|---|---|
| <ul style="list-style-type: none">• Hiring a professional licensed pest control company with expertise and experience in controlling specific vermin populations.• Seal or screen openings that allow rodents and insects to enter the building, such as door and window frames, vents, and masonry cracks.• Implement practices that reduce the likeliness of attracting vermin.• Provide and require use of suitable personal protective clothing and equipment.• Maintain good housekeeping in waste processing and storage areas.• Grade the area properly to prevent ponding (to minimize insect breeding areas);• Use integrated pest-control approaches to control vermin levels, treating infested areas, such as exposed faces and flanks with insecticide, if necessary | <ul style="list-style-type: none">• Supplying site staff with all necessary PPE.• Displaying brightly colored warning signs around equipment and machinery.• Regularly maintain and monitor equipment and machinery.• Implemented emergency shut down mechanisms on equipment and machinery.• Keep all areas clean and tidy.• Check bunds and tanks for leaks.• Check the provision of oil spillage kits and absorbent materials.• Ensure tanks and containers are secured against unauthorized access.• Provide continuous staff training.• Make emergency phone numbers visible and accessible.• Provide worker immunization and health monitoring (e.g. for Hepatitis B and tetanus);• Clean and wash with disinfectant the cabins of heavy mobile equipment used at regular intervals; |
|---|---|

ANNEX 7: LIST OF EUROPEAN WASTE CATALOGUE (EWC) OF WASTE OILS

Table 8 Collection categories of used oil and their respective EWC codes.

EWC Code	Description
Collection Category No. 1: non-chlorinated machine, gear and lubricating oils	
13 01 10*	mineral-based non-chlorinated hydraulic oils
13 02 05*	mineral-based non-chlorinated engine, gear and lubricating oils
13 02 06*	synthetic engine, gear and lubricating oils
13 02 08*	other engine, gear and lubricating oils
13 03 07*	mineral-based non-chlorinated insulating and heat transmission oils
Collection Category No. 2: halogen-free hydraulic oils	
12 01 07*	mineral-based machining oils free of halogens (except emulsions and solutions)
12 01 10*	synthetic machining oils
13 01 11*	synthetic hydraulic oils
13 01 13*	other hydraulic oils
Collection Category No. 3: halogenated or chlorinated oils	
12 01 06*	mineral-based machining oils containing halogens (except emulsions and solutions)
13 01 01*	hydraulic oils containing PCBs with a PCB content not higher than 50 mg/kg
13 01 09*	mineral-based chlorinated hydraulic oils
13 02 04*	mineral-based chlorinated engine, gear and lubricating oils
13 03 01*	insulating or heat transmission oils containing PCBs with a PCB content not higher than 50 mg/kg
13 03 06*	mineral-based chlorinated insulating and heat transmission oils other than those mentioned in 13 03 01*
Collection Category No. 4: biodegradable oils, oils from oil/water mixtures, heating oils and diesel fuels	
13 01 12*	readily biodegradable hydraulic oils
13 02 07*	readily biodegradable engine, gear and lubricating oils
13 03 08*	synthetic insulating and heat transmission oils
13 03 09*	readily biodegradable insulating and heat transmission oils
13 03 10*	other insulating and heat transmission oils

Technical Guidelines on Oil & Lubricants Waste Recycling

EWC Code	Description
13 05 06*	oil from oil/water separators
13 07 01*	fuel oil and diesel

(*): Hazardous waste